深圳市全动电子科技有限公司
QD Technology Co., Ltd

7.0 inch 规格书

Customer 客户	
Part No. 零件编号	待定
Date 时间	**2024-04-20**
Version 版本	**01**
Remarks 备注	□Approval for Specification Only ■Approval for Specification and Sample 规格和样品批准

CUSTOMER					
APPROVED 批准	**CHECKED** 检查	**PREPARED** 制作	**APPROVED** 批准	**CHECKED** 检查	**PREPARED** 制作
Quality control 品质	**Engineer** 工程	--------	**Quality control** 品质	**Engineer** 工程	-------
		--------			-------

Address:

Telephone:

Fax:

Website:

Revision Record
修订记录

Rev. No.	Date	Description 描述
V01	2024-10-18	Preliminary Specification Release. 初步规格发布

Contents
内容

1. General Specifications 1
总体规格

2. Mechanical Drawing 2
机械图纸

3. Pin Assignments 3
引脚分配

4. Electrical Specification 4
电子规格

4.1. DC Characteristics 4
直流特性

4.2. Typical Operation Conditions 4
平常运行条件

4.3. Backlight Circuit Characteristics 5
背光线路特性

4.4. Power on/off Sequence 6
上下电顺序

4.5. Timing for RGB Interface 7
RGB 接口时序

4.6. Parallel 24 bit RGB Input Timing Table 8
并行 24 位 RGB 输入时序

4.7. Electro-Optical Characteristics 9
光电特性

5. Measurement System 10
检测系统

5.1. LCM Viewing Angle 10
LCM 观看角度

5.2. Response Time 10
反应时间

5.3. Contrast Ratio (CR) 10
对比度

6. Reliability Test Items 11
可靠性测试项目

7. Suggestions for Using LCD Modules 13
使用 LCD 模块的建议

8. Storage Method 16
储存方法

1. General Specifications

Item 项目	Contents 内容	Unit 单位
Size 尺寸	7.0’TFT	inch 英尺
LCM Dimension LCM 尺寸	193(W)*110.8(H)*9.4(D)	mm
LCD Active Area LCD 显示区域	154.21*85.92	mm
Number of Dots 点数	800*RGB*480	pixel 像素
LCD Type LCD 种类	a-Si TFT	
Viewing Direction 观看方向	ALL O'CLOCK	
Driver IC IC 驱动	HX8282+HX8696	
Interface Type 接口类型	Parallel RGB 24-bit	
Operating Temperature 运行温度	-20℃~70℃	
Storage Temperature 储存温度	-30℃~80℃	
Backlight Type 背光源类型	7*3chips white LED	
Weight 重量	TBD	g
Construction 结构	Glass+Glass/所用材料	
First Layer 第一层	Glass Cover Lens (Thickness 厚度:1.1)	mm
Second Layer 第二层	Glass Sensor (Thickness/厚度:1.1)	mm
Surface Hardness 表面硬度	6H	

2. Mechanical Drawing

机械图纸

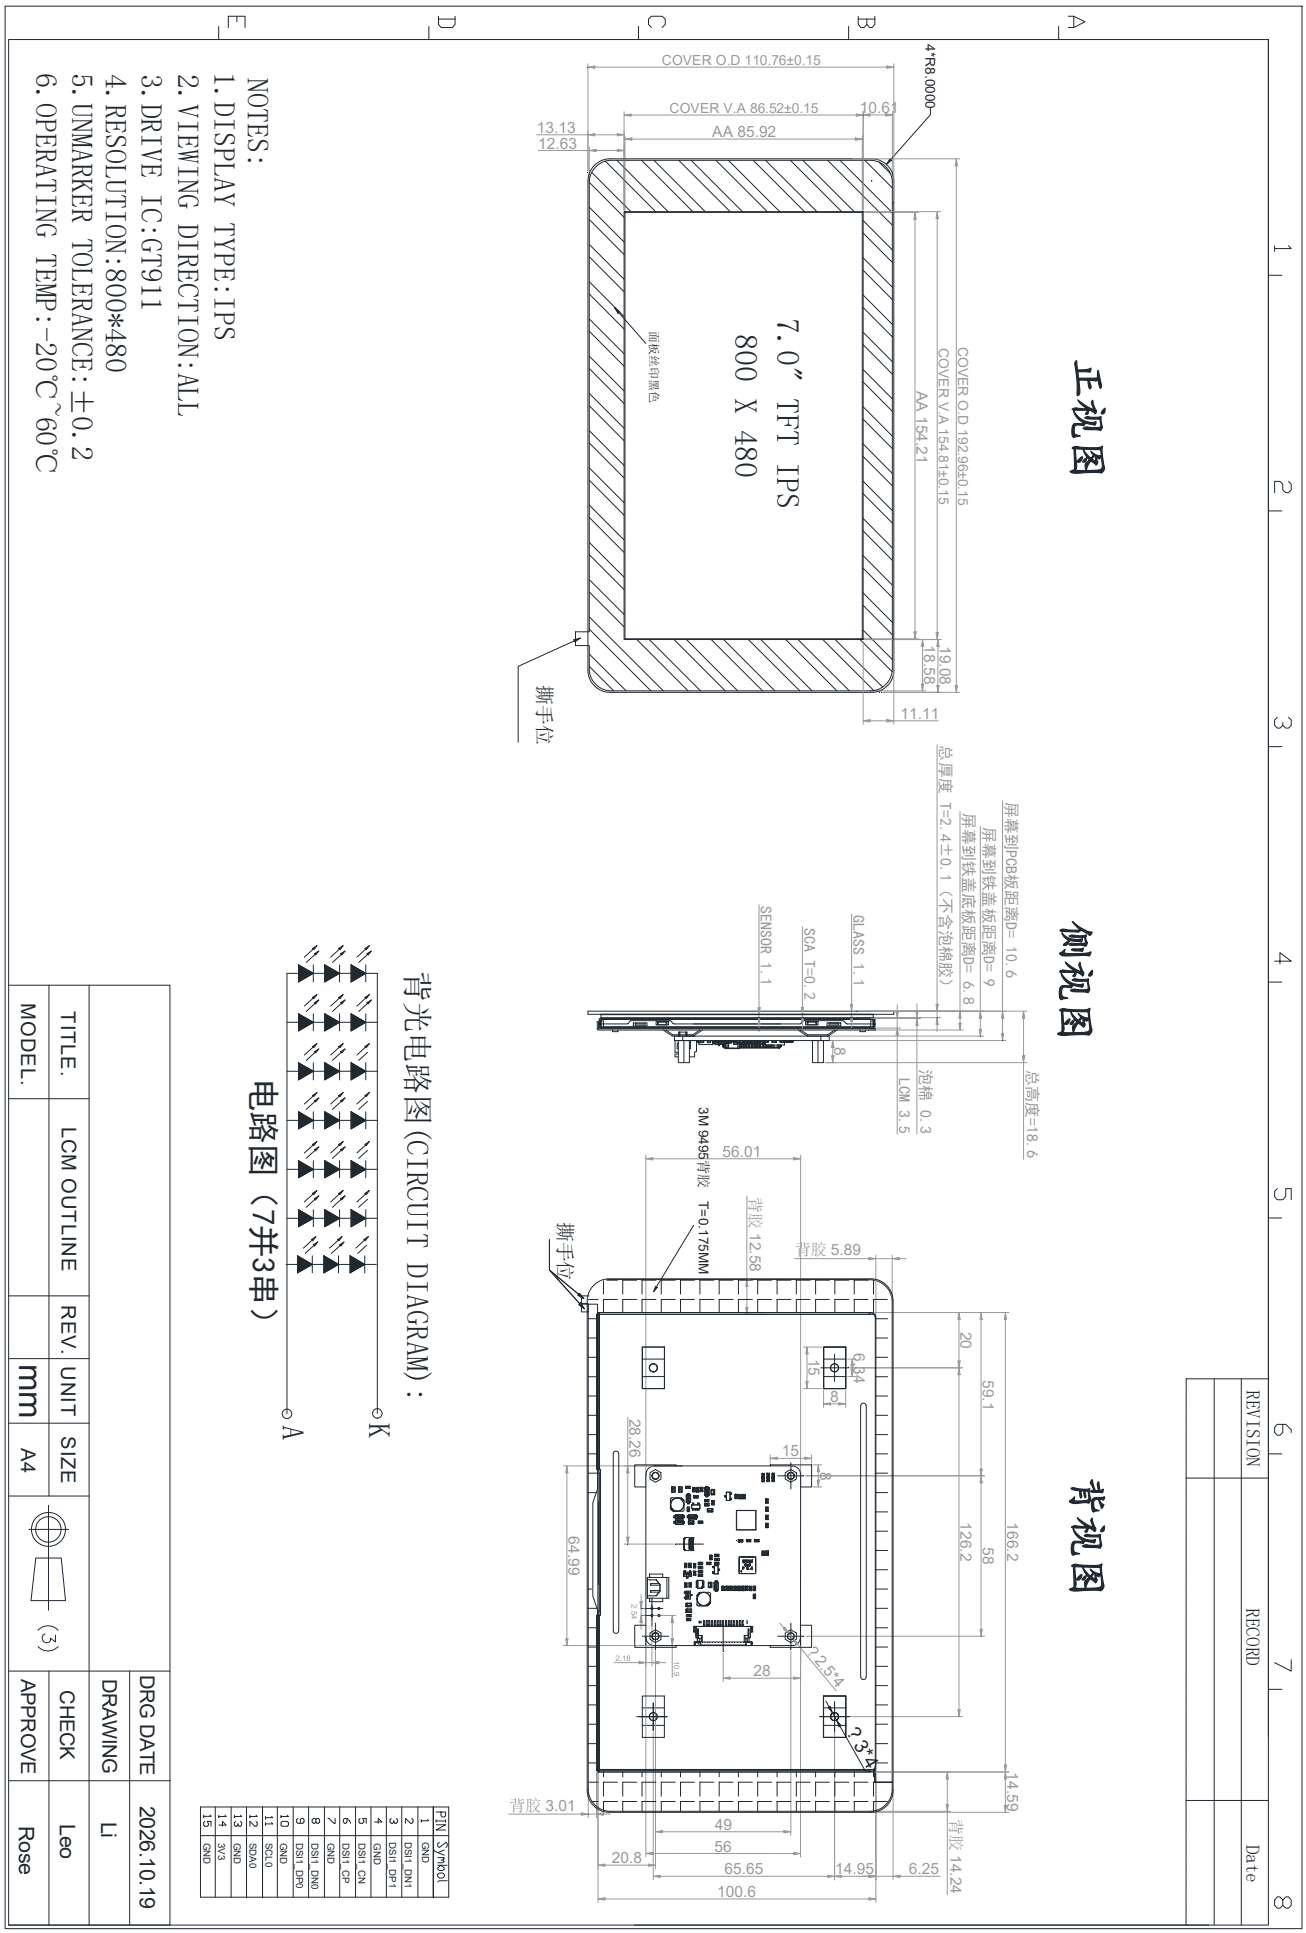

3. Pin Assignments

引脚分配

Pin No.	Symbol	Description
1	LED+	POWER SUPPLY FOR BACKLIGHT 背光正极
2	LED+	POWER SUPPLY FOR BACKLIGHT 背光正极
3	LED-	THE BACKLIGHT GROUND 背光负极
4	LED-	THE BACKLIGHT GROUND 背光负极
5	GND	GROUND 接地
6	VCOM	FOR EXTERNAL VCOM DC INPUT 外部 COM 直连电压输入
7	DVDD	DIGITAL POWER 数字电源
8	MODE	DE/SYNC MODE SELECT MODE=H: DE MODE(NORMALLY PULL HIGH) MODE=L: HSD/VSD MODE DE/SYNC 模式选择 MODE 为高电平：DE 模式（正常情况拉高） MODE 为低电平：HSD/VSD 模式
9	DE	DATA ENABLE SIGNAL 数据使能信号
10	VSD	VERTICAL SYNC INPUT IN RGB MODE 垂直同步信号
11	HSD	HORIZONTAL SYNC INPUT IN RGB MODE 水平同步信号
12	B7	BLUE DATA 蓝色信号
13	B6	BLUE DATA 蓝色信号
14	B5	BLUE DATA 蓝色信号
15	B4	BLUE DATA 蓝色信号
16	B3	BLUE DATA 蓝色信号
17	B2	BLUE DATA 蓝色信号
18	B1	BLUE DATA 蓝色信号
19	B0	BLUE DATA 蓝色信号
20	G7	GREEN DATA 绿色信号
21	G6	GREEN DATA 绿色信号
22	G5	GREEN DATA 绿色信号
23	G4	GREEN DATA 绿色信号
24	G3	GREEN DATA 绿色信号
25	G2	GREEN DATA 绿色信号
26	G1	GREEN DATA 绿色信号
27	G0	GREEN DATA 绿色信号
28	R7	RED DATA 红色信号
29	R6	RED DATA 红色信号
30	R5	RED DATA 红色信号
31	R4	RED DATA 红色信号
32	R3	RED DATA 红色信号
33	R2	RED DATA 红色信号
34	R1	RED DATA 红色信号
35	R0	RED DATA 红色信号
36	GND	GROUND 接地
37	DCLK	CLOCK SIGNAL RGB 时钟信号
38	GND	GROUND 接地
39	SHLR	SOURCE RIGHT OR LEFT SEQUENCE CONTROL SHLR=H: RIGHT SHIFT, LEFT TO RIGHT SHLR=L: LEFT SHIFT, RIGHT TO LEFT 源极右或左序列控制 SHLR 为高电平：右位移显示，从左往右 SHLR 为低电平：左位移显示，从右往左
40	UPDN	GATE UP OR DOWN SCAN CONTROL

		UPDN=H: UP SHIFT, DOWN TO UP UPDN=L: DOWN SHIFT, UP TO DOWN 栅极上或下扫码控制 UPDN 为高电平：上位移显示，从下往上 UPDN 为低电平：下位移显示，从上往下
41	VDDG(VGH)	POSITIVE POWER FOR TFT 栅极正电压
42	VEEG(VGL)	NEGATIVE POWER FOR TFT 栅极负电压
43	AVDD	ANALOG POWER 模拟电源
44	RSTB	GLOBAL RESET PIN ACTIVE LOW TO ENTER RESET STATE. NORMALLY PULL HIGH. SUGGEST TO CONNECTING WITH AN RC RESET CIRCUIT FOR STABILITY. 全局复位引脚 低电平有效，进入复位状态。正常情况下拉高 建议连接一个阻容复位电路来维持稳定性
45	NC	NC
46	VCOM	FOR EXTERNAL VCOM DC INPUT 外部 COM 直连电压输入
47	DITH	DITHERING SETTING DITH="H" 6-BIT RESOLUTION (LAST 2 BITS OF INPUTDATA TURNCATED) DITH="L" 8-BIT RESOLUTION (DEFAULT SETTING) 抖动设置 DITH 为高电平：6 位分辨率（输入数据的最后两位翻转） DITH 为低电平：8 位分辨率（默认设置）
48	GND	GROUND 接地
49	NC	NC
50	NC	NC

4. Electrical Specification
电气特性

4.1. DC Characteristics
DC 特性

Item	Symbol	Min	Typ.	Max	Unit
TFT gate on voltage TFT 栅极导通电压	VGH	17.5	18.5	19.5	V
TFT gate off voltage TFT 栅极关闭电压	VGL	-7.5	-6.5	-5.5	V
TFT common electrode Voltage TFT 公共电极电压	Vcom	2.8	3.0	3.2	V

4.2. Typical Operation Conditions
平常运行条件

Item	Symbol	Min.	Typ.	Max.	Unit
Analog Supply Voltage 模拟电源电压	VCI	3.0	3.3	3.6	V
Digital Supply Voltage 数字电源电压	VDD	3.3	3.3	3.6	V
I/O Supply Voltage I/O 电源电压	IOVCC	3.3	3.3	3.6	V
Input High Voltage 输入高电压	VIH	0.8*IOVCC	-	IOVCC	V
Input Low Voltage 输入低电压	VIL	0	-	0.2*IOVCC	V
Output High Voltage 输出高电压	VOH	0.8*IOVCC	-	-	V
Output Low Voltage 输出低电压	VOL	-	-	0.2*IOVCC	V

4.3. Backlight Circuit Characteristics

背光源线路特性

Item 项目	Symbol 标志	Min.	Typ.	Max.	Unit
LED Current 电流 LED	IB	--	140	--	mA
LED Voltage 电压 LED	Vf	9.0	9.6	10.2	V
LCM Brightness 亮度 LCM	L	350	--	--	cd/m2

4.4. Power on/off Sequence 上下电顺序

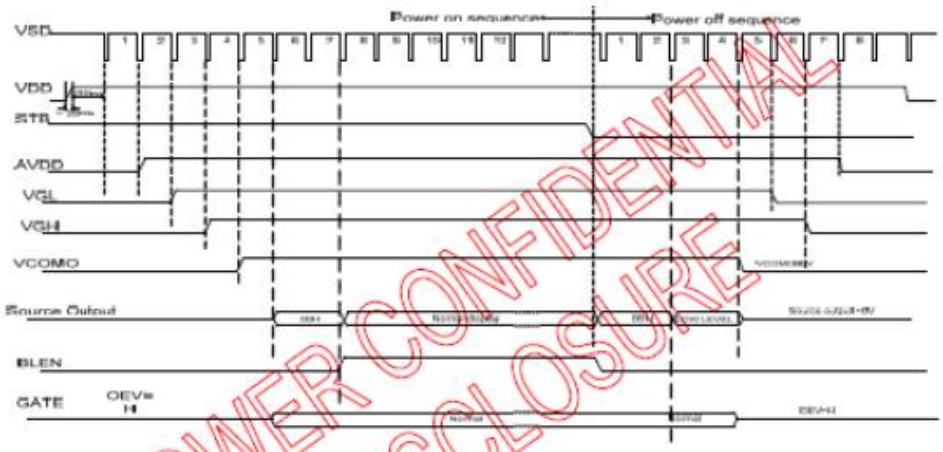

Power On/Off timing chart

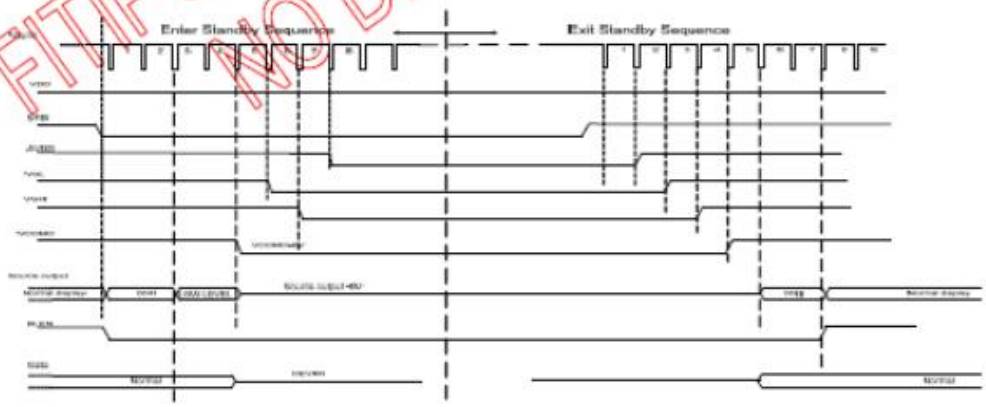

Enter and Exit Standby Mode timing chart

Note: Low level=3Fh,when NBW=L(Normally white)
Low level=00h,when NBW=H(Normally black)

FITIPOWER CONFIDENTIAL
NO DISCLOSURE

4.5. Timing for RGB Interface

RGB 接口时序

- **Vertical timing**

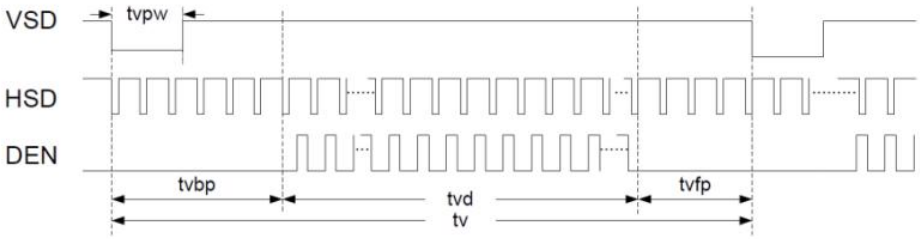

Figure 10.2: Vertical input timing diagram

- **Horizontal timing**

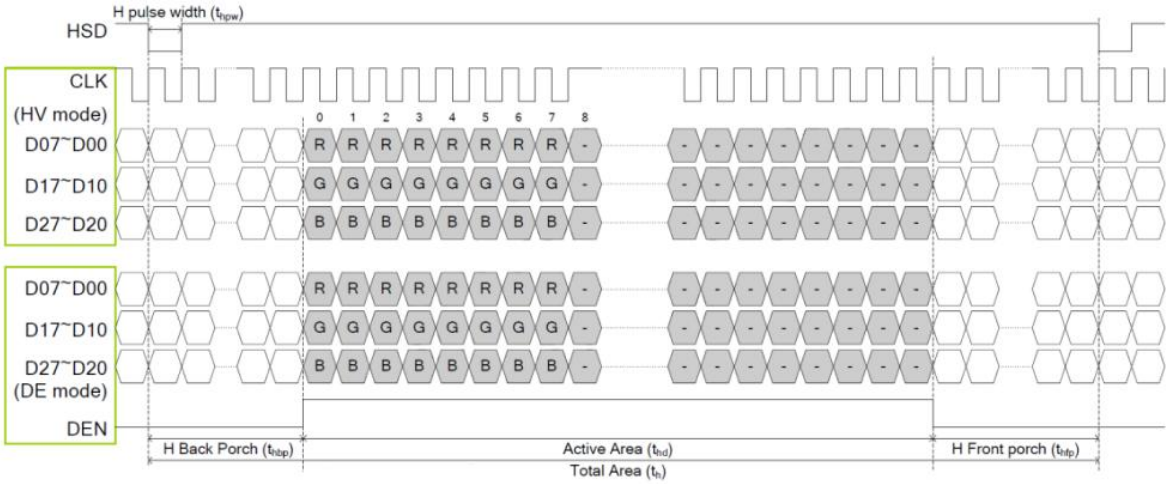

Figure 10.3: Horizontal input timing diagram

4.6. Parallel 24 bit RGB Input Timing Table

并行 24 位 RGB 输入时序

Resolution: 1024x600

DE mode

Parameter	Symbol	Spec.			Unit
		Min.	Typ.	Max.	
DCLK frequency	fclk	40.8	51.2	67.2	MHz
Horizontal display area	thd		1024		DCLK
HSD period	th	1114	1344	1400	DCLK
HSD blanking	thb+thfp	90	320	376	DCLK
Vertical display area	tvd		600		T_H
VSD period	tv	610	635	800	T_H
VSD blanking	tvbp+tvfp	10	35	200	T_H

HV mode

- **Horizontal timing**

Parameter	Symbol	Spec.			Unit
		Min.	Typ.	Max.	
DCLK frequency	fclk	44.9	51.2	63	MHz
Horizontal display area	thd		1024		DCLK
HSD period	th	1200	1344	1400	DCLK
HSD pulse Width	thpw	1	-	140	DCLK
HSD back porch	thbp		160		DCLK
HSD front porch	thfp	16	160	216	DCLK

- **Vertical timing**

Parameter	Symbol	Spec.			Unit
		Min.	Typ.	Max.	
Vertical display area	tvd		600		T_H
VSD period	tv	624	635	750	T_H
VSD pulse width	tvpw	1	-	20	T_H
VSD back porch	tvbp		23		T_H
VSD front porch	tvfp	1	12	127	T_H

4.7. Electro-Optical Characteristics

光电特性

Items		Symbol	Condition	Specifications			Unit	Note
				Min.	Typ.	Max.		
Contrast Ratio		CR		-	300	-	-	
Response Time		T_R		-	10	20	ms	
		T_F		-	15	20	ms	
Chromaticity	Red	X_R		0.604	0.634	0.664	-	
		Y_R		0.298	0.328	0.358	-	
	Green	X_G		0.264	0.294	0.324	-	
		Y_G		0.547	0.577	0.607	-	
	Blue	X_B		0.107	0.137	0.167	-	
		Y_B		0.104	0.134	0.164	-	
	White	X_W		0.272	0.302	0.332	-	
		Y_W		0.305	0.335	0.365	-	
Viewing angle	Hor.	ϕ1(3 o'clock)	Center CR≥10	-	45	-	deg.	
		ϕ2(9 o'clock)		-	45	-		
	Ver.	θ2(12 o'clock)		-	35	-		
		θ1(6 o'clock)		-	15	-		
NTSC ratio					61.5		%	

Note 1: Definition of Contrast Ratio (CR):

The contrast ratio can be calculated by the following expression.

Contrast Ratio (CR) = L63 / L0

L63: Luminance of gray level 63

L0: Luminance of gray level 0

CR = CR (10)

CR (X) is corresponding to the Contrast Ratio of the point X at Figure in Note 5.

Note 2: Definition of Response Time (TR, TF):

5. Measurement System
测试系统

5.1. LCM Viewing Angle
LCM 观看角度

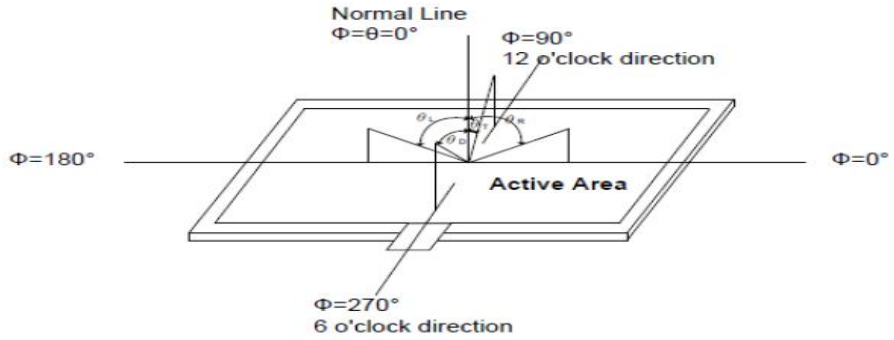

Viewing angle is the angle at which the contrast ratio is greater than 10.The angles are determined for the horizontal or x axis and the vertical or y axis with respect to the z axis which is normal to the LCD surface.观看角度是对比度大于 10 的角度。角度是针对水平（x 轴）和垂直（y 轴）相对于与 LCD 表面垂直的 z 轴确定的。

5.2. Response Time
响应时间

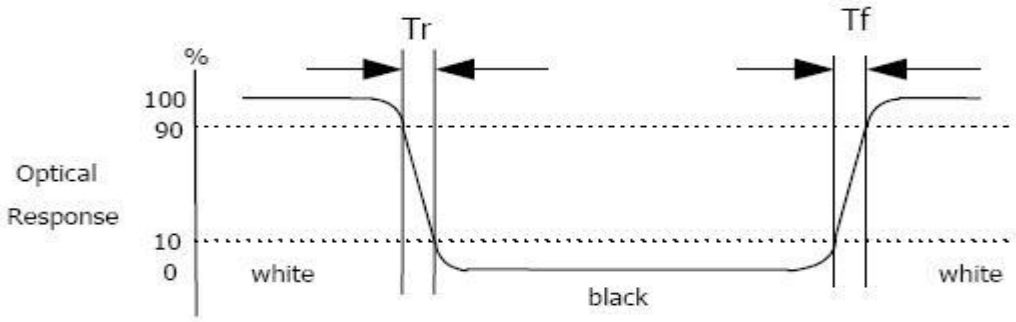

Response time is the time required for the display to transition from white to black (Rising time, T_r) and from black to white (Falling time, T_f) for additional information.响应时间是显示器从白色过渡到黑色（上升时间，Tr）和从黑色过渡到白色（下降时间，Tf）以获取附加信息所需的时间。

5.3. Contrast Ratio (CR)
对比度

Contrast Ratio (CR) is defined mathematically as:
对比度 (CR) 在数学上定义为：

$$\text{Contrast Ratio}=\frac{\text{Surface Luminance with all white pixels}}{\text{Surface Luminance with all black pixels}}$$

$$\text{对比度}=\frac{\text{全白像素的表面亮度}}{\text{全黑像素的表面亮度}}$$

Surface luminance is the center point across the LCD surface 500mm from the surface with all pixels displaying white.

表面亮度是整个 LCD 表面的中心点，距离表面 500 毫米，所有像素都显示白色。

6. Reliability Test Items

可靠性测试项目

Test Item 测试项目	Test Condition 测试状态	Test result determinant gist 测试结果决定性要点
High temperature storage 高温储存	80±3℃,96H;	1. Inspection after 2~4hours storage at room temperature, the sample shall be free from defects: a). Air bubble in the LCD; b). Non-display; c). Glass crack; 2. The electrical characteristics requirements shall be satisfied. 1. 样品在室温下存放 2~4 小时后检验，样品应无缺陷： a) LCD 中有气泡； b)不显示； C）玻璃裂纹； 2、满足电气特性要求
Low temperature storage 低温储存	-30±3℃,120H;	
High temperature operation 高温运行	70±3℃,96H;	
Low temperature operation 低温运行	-20±3℃,96H;	
High temperature / humidity 高温/亮度	60℃±3℃,90%±3%RH,96H;	
Thermal Shock 热冲击	-20℃/0.5h~+70℃/0.5h for a total 24 cycles；24 小时总循环	
Vibration Test 震动测试	Frequency:10Hz~55Hz~10Hz; Amplitude:1.5mm, X, Y, Z direction for total 1H; (Packing condition)	
ESD test ESD 测试	±4KV, Human Body Mode,150pF/330Ω; ±8KV, Air Mode, 150pF/330Ω;	

Remark:
备注

1.The test samples should be applied to only one test item.
测试样品只能应用于一个测试项目。

2.Sample size for each test item is 2pcs.

每个测试项目的样本大小为 2 个。

3.Failure Judgment Criterion: Basic Specification, Electrical Characteristic, Mechanical

Characteristic, Optical Characteristic.

3.故障判断标准：基本规格、电气特性、机械特性、光学特性。

7. Suggestions for Using LCD Modules

LCD 模块的使用建议

1) The display panel is made of glass and polarizer. As glass is fragile. It tends chipped during handling especially on the edges. Please avoid dropping or jarring. Do not subject it to a mechanical shock by dropping it or impact.

显示面板由玻璃和偏光片制成。 因为玻璃易碎，在处理过程中，特别是在边缘处，它会比较容易碎裂。 请避免掉落或震动。 请勿使其跌落或撞击而受到机械冲击。

2) If the display panel is damaged and the liquid crystal substance leaks out, be sure not to get any in your mouth. If the substance contacts your skin or clothes, wash it off using soap and water.

如果显示面板损坏和液晶物质泄漏，请务必不要让其进入您的嘴里。 如果该物质接触到您的皮肤或衣服，请用肥皂和水清洗。

3) Do not apply excessive force to the display surface or the adjoining areas since this may cause the color tone to vary. Do not touch the display with bare hands. This will stain the display area and degraded insulation between terminals (some cosmetics are determined to the polarizer).

请勿对显示器表面或相邻区域施加过大的力，因为这可能会导致色调发生变化。 请勿赤手触摸显示屏。 这会弄脏显示区域。

4) The polarizer covering the display surface of the LCD module is soft and easily scratched. Please handle this polarizer carefully. Please do not touch, push or rub the exposed polarizers with anything harder than an HB pencil lead (glass, tweezers, etc.). Please do not put or attach anything on the display area to avoid leaving marks on it. Condensation on the surface and contact with terminals due to cold will be damaged, or dirty the polarizer. After products are tested at low temperature they must be warmed up in a container before coming in to contact with room temperature air.

覆盖在液晶模组显示面上的偏光片柔软，且容易划伤。 请小心处理这个偏光片。 请不要用比 HB 铅笔芯（玻璃、镊子等）更硬的任何东西接触、推动或摩擦暴露的偏光片。 请勿在展示区域放置或粘贴任何物品，以免在其上留下痕迹。其表面冷凝和因寒冷而与端子接触会损坏或弄脏偏光片。 产品在低温下测试后，必须在容器中预热，然后再与室温空气接触。

5) If the display surface becomes contaminated, exhale on the surface and gently wipe it with a soft dry cloth. If it is heavily contaminated, moisten cloth with one of the following solvents

- Isopropyl alcohol
- Ethyl alcohol

Do not scrub hard to avoid damaging the display surface.

如果显示器表面被污染，请在表面呼气并用柔软的无尘布轻轻擦拭。 如果它被严重污染，请用以下溶剂之一弄湿布

- 无水丙醇

- 乙醇

请勿用力擦洗，以免损坏显示器表面。

6) Solvents other than those above-mentioned may damage the polarizer. Especially, do not use the following.

- Water
- Ketone
- Aromatic solvents

Wipe off saliva or water drops immediately, contact with water over a long period of time may cause deformation or color fading. Avoid contact with oil and fats.

6) 上述以外的溶剂可能会损坏偏光片。 请勿使用以下溶剂。

- 水
- 丙酮

立即擦掉唾液或水滴，长时间与水接触可能会导致变形或褪色。 避免接触油和脂肪。

7) Exercise care to minimize corrosion of the electrode. Corrosion of the electrodes is accelerated by water droplets, moisture condensation or a current flow in a high-humidity environment.

小心操作以尽量减少电极的腐蚀。 水滴、湿气凝结或电缆会加速电极的腐蚀。

8) Install the LCD Module by using the mounting holes. When mounting the LCD module make sure it is free of twisting, warping and distortion. In particular, do not forcibly pull or bend the I O cable or the backlight cable.

使用安装孔安装 LCD 模块。 安装 LCD 模块时，请确保其没有扭曲、翘曲和变形。 尤其不要强行拉扯或弯曲 I O 电缆或背光电缆。

9) Do not attempt to disassemble or process the LCD module.

请勿尝试拆卸或加工 LCD 模块。

10) NC terminal should be open. Do not connect anything.

NC 终端应打开。 不要连接任何东西。

11) If the logic circuit power is off, do not apply the input signals.

如果逻辑电路电源关闭，请勿施加输入信号。

12) Electro-Static Discharge Control, since this module uses a CMOS LSI, the same careful attention should be paid to electrostatic discharge as for an ordinary CMOS IC. To prevent destruction of the elements by static electricity, be careful to maintain an optimum work environment.

- Before removing LCM from its packing case or incorporating it into a set, be sure the module and your body have the same electric potential. Be sure to ground the body when handling the LCD modules.
- Tools required for assembling, such as soldering irons, must be properly grounded. Make certain

the AC power source for the soldering iron does not leak. When using an electric screwdriver to attach LCM, the screwdriver should be of ground potentiality to minimize as much as possible any transmission of electromagnetic waves produced sparks coming from the commutator of the motor.

- To reduce the amount of static electricity generated, do not conduct assembling and other work under dry conditions. To reduce the generation of static electricity be careful that the air in the work is not too dry. A relative humidity of 50%-60% is recommended. As far as possible make the electric potential of your work clothes and that of the work bench the ground potential.

- The LCD module is coated with a film to protect the display surface. Exercise care when peeling off this protective film since static electricity may be generated.

静电放电控制，由于该模块使用 CMOS LSI，因此应与普通 CMOS IC 一样注意静电放电。 为防止静电损坏元件，请注意保持最佳工作环境。

- 从包装箱中取出 LCM 或将其装入套件之前，请确保

模块和您的身体具有相同的电势。 处理 LCD 模块时一定要把身体接地。

- 组装所需的工具，例如烙铁，必须正确接地。 确保烙铁的交流电源不漏电。 使用电动螺丝刀安装 LCM 时，螺丝刀应具有接地电位，以尽可能减少来自电机换向器产生的火花的电磁波传输。

- 为减少静电产生量，请勿在干燥条件下进行组装和其他工作。 为减少静电的产生，请注意工作中的空气不要太干燥。 建议相对湿度为 50%-60%。 尽量使您的工作服和工作台的电位为地电位。

- LCD 模块涂有一层薄膜以保护显示表面。 剥离此保护膜时请小心，因为可能会产生静电。

13) Since LCM has been assembled and adjusted with a high degree of precision, avoid applying excessive shocks to the module or making any alterations or modifications to it.

- Do not alter, modify or change the shape of the tab on the metal frame.

- Do not make extra holes on the printed circuit board, modify its shape or change the positions of components to be attached.

- Do not damage or modify the pattern writing on the printed circuit board.

- Absolutely do not modify the zebra rubber strip (conductive rubber) or heat seal connector.

- Except for soldering the interface, do not make any alterations or modifications with a soldering iron.

- Do not drop, bend or twist the LCM.

由于 LCM 已高精度组装和调整，请避免对模块施加过大的冲击或对其进行任何改动或修改。

- 请勿改动、修改或改变金属框架上拉环的形状。

- 不要在印刷电路板上打额外的孔，修改其形状或改变要连接的组件的位置。

- 不要损坏或修改印刷电路板上的图案书写。

- 绝对不要改装斑马橡胶条（导电橡胶）或热封接头。

- 除焊接接口外，请勿使用烙铁进行任何改动或修改。
- 不要掉落、弯曲或扭曲 LCM。

8. Storage Method

储存方法

1) Store in an ambient temperature of 23°C±5°C, and in a relative humidity of 55%±15%. Don't exceed 12 months and expose to sunlight or fluorescent light.

环境温度为 23°C±5°C，相对湿度为 55%±15%。 不要超过 12 个月并暴露在阳光或荧光灯下。

2) Store in a clean environment, free from dust, active gas, and solvent.

存放在清洁的环境中，无灰尘、无活性气体和溶剂。

3) LCM module is stored in warehouse, Store in antistatic container, there may be air bubbles between the protective film on the surface of polarizer and polarizer. It can only be found under LED light, before production, IQC should be inspected directly by LED light, if residual traces are found, alcohol should be used to wipe them.

LCM 模块存放在仓库中，偏光片和偏光片表面的保护膜之间可能会有气泡。 只能在 LED 灯下发现，生产前，IQC 应直接用 LED 灯检查，如有残留痕迹，可用酒精擦拭。