

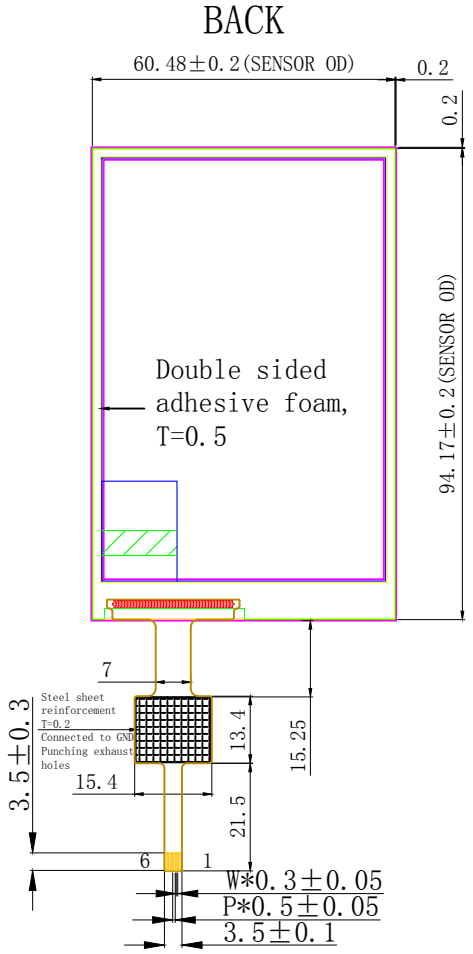


Rev	Nature of Modification	DATE
1.0	Original version	2023-12-14

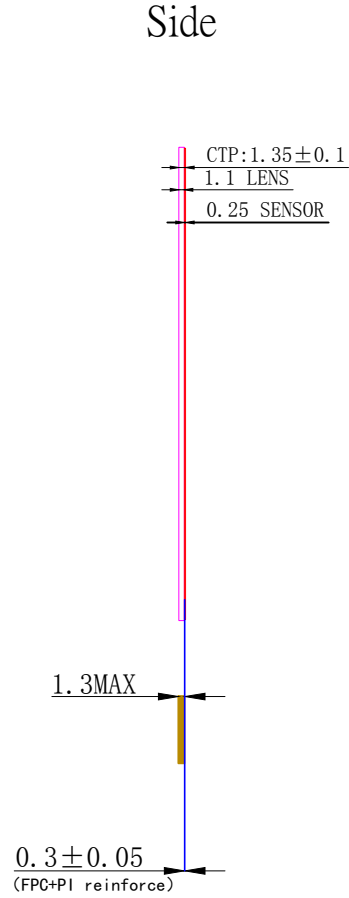

- NOTES:
- STRUCTURE: G+F
 - OPERATION TEMP: -20°C~+60°C
 - STORAGE TEMP: -30°C~+70°C
 - TRANSMITTANCE: ≥45%
 - SYRFACE HARDNESS: ≥6H
 - UNMARKER TOLERANCE: ±0.2mm
 - DRIVE IC: FT6336U (single-point)
 - ROHS compliant

PIN#	ASSIGNMENT	SCALE: 1 : 1 NOT TO SCALE		PAGE: 1 OF 1	
1	VDD	GENERAL TOL. 0.50mm	UNITS MM	MODEL NUMBER :	
2	SCL<2.8V>	APPROVALS	DATE		CUSTOMER NO.:
3	SDA<2.8V>	APP:			DATE:
4	INT<2.8V>	CHK:			
5	RST<2.8V>	DWN:	2023-12-14		
6	GND<2.8V>				

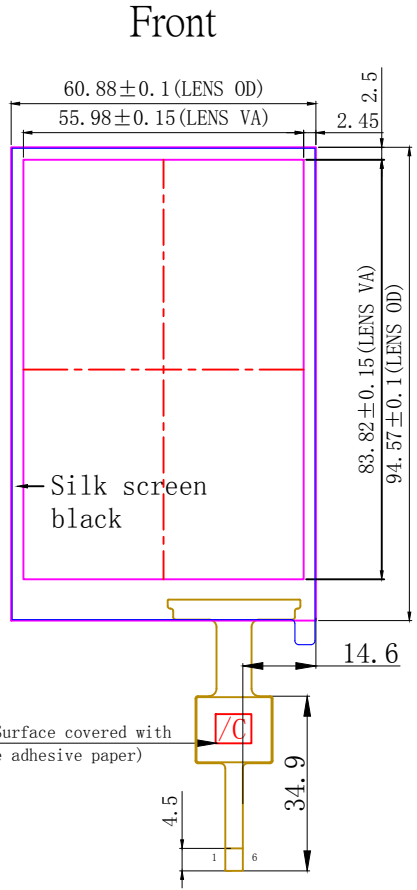