

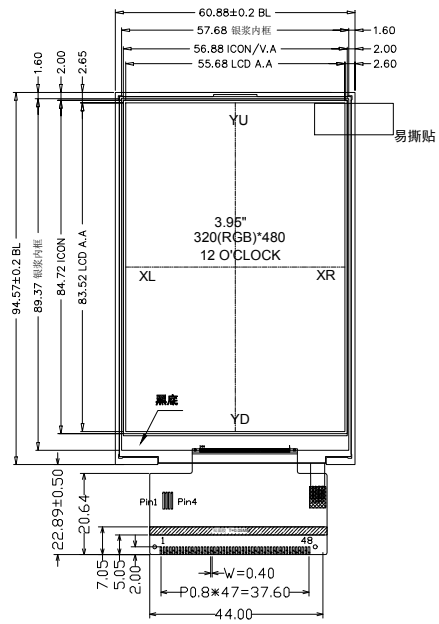


REV.	DRG DATE	DESCRIPTION	DRAWN BY
1.0			

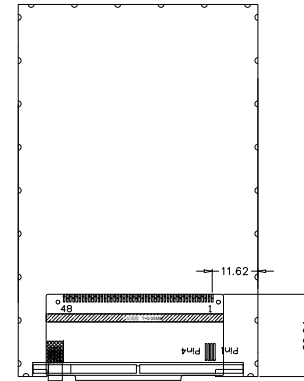


2.50±0.1<不包含背胶厚度

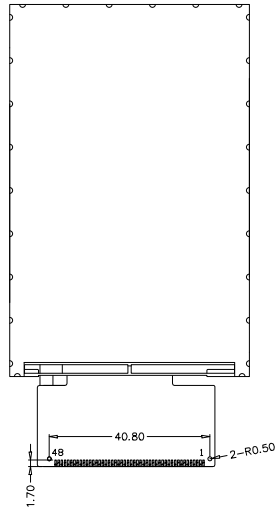

弯折示意图
展开出货

No	PIN NAME	No	PIN NAME
1	YU	25	DB10
2	XL	26	DB11
3	YD	27	DB12
4	XR	28	DB13
5	VDD	29	DB14
6	IDVCC	30	DB15
7	TE	31	DB16
8	CSX	32	DB17
9	DCX	33	GND
10	WRX/SCL	34	DEN
11	RD	35	PCLK
12	SDA	36	HSYNC
13	SDD	37	VSYNC
14	GND	38	RESET
15	DB0	39	IM2
16	DB1	40	IM1
17	DB2	41	IM0
18	DB3	42	LEDA
19	DB4	43	LEDK
20	DB5	44	LEDK
21	DB6	45	LEDK
22	DB7	46	LEDK
23	DB8	47	LEDK
24	DB9	48	LEDK



背光电路图

- NOTES:
1. DISPLAY TYPE: 3.95" TFT
 2. VIEWING DIRECTION: 12 O' CLOCK
 3. LCD DRIVE IC: IVO+ST7796S
 4. POLARIZER MODE: TRANSMISSIVE/POSITIVE
 5. OPERATING TEMP: -10° C~+60° C
 6. STORAGE TEMP: -20° C~+70° C
 7. UNMARKER TOLERANCE: ±0.20
 8. REQUIREMENTS ON ENVIRONMENTAL PROTECTION: RoHS

深圳市全动电子技术有限公司					DRG DATE	2023.12.05
					DRAWING	
TITLE.	LCM OUTLINE	REV.	UNIT	SIZE	CHECK	
MODEL.	QD3958	A	mm	A4	APPROVE	

