


```
pi@raspberrypi: ~
GNU nano 2.7.4 File: /etc/X11/xorg.conf.d/99-calibration.conf Modified
Section "InputClass"
    Identifier      "calibration"
    MatchProduct    "深圳市全动电子技术有限公司 ByQDtech 触控USB鼠标"
    Option "Calibration" "0 789 14 465"
    Option "SwapAxes" "0"
EndSection

Save modified buffer? (Answering "No" will DISCARD changes.)
Y Yes
N No      ^C Cancel
```

3.4 Press Enter key to confirm saving file name

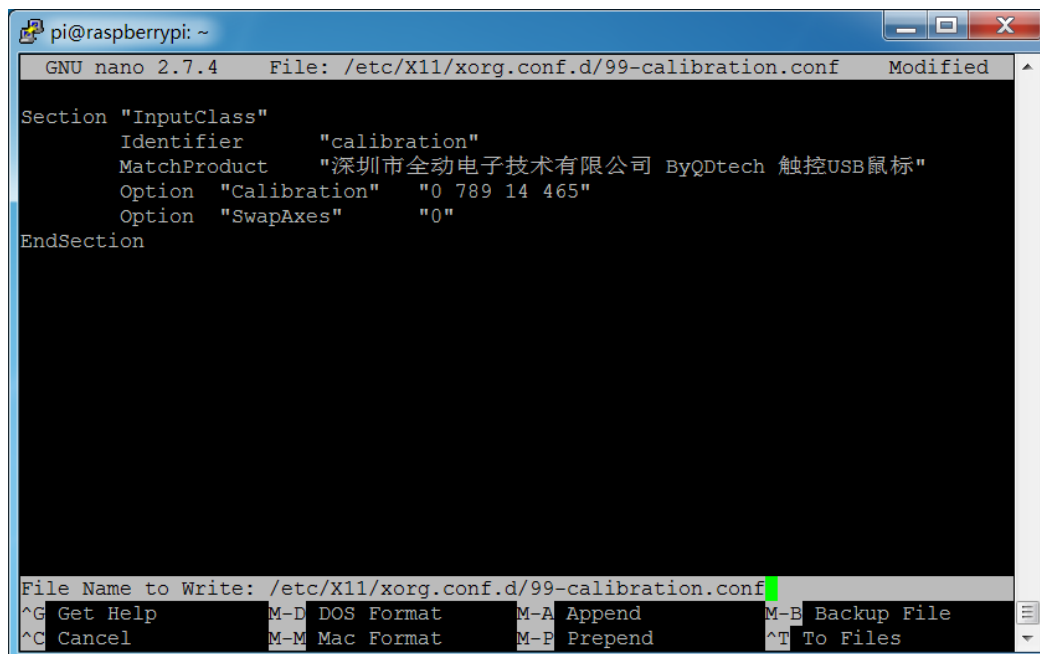

```
pi@raspberrypi: ~
GNU nano 2.7.4 File: /etc/X11/xorg.conf.d/99-calibration.conf Modified
Section "InputClass"
    Identifier      "calibration"
    MatchProduct    "深圳市全动电子技术有限公司 ByQDtech 触控USB鼠标"
    Option "Calibration" "0 789 14 465"
    Option "SwapAxes" "0"
EndSection

File Name to Write: /etc/X11/xorg.conf.d/99-calibration.conf
^G Get Help      M-D DOS Format   M-A Append      M-B Backup File
^C Cancel        M-M Mac Format   M-P Prepend     ^T To Files
```

3.5 Restart the Raspberry Pi to complete the operation

```
sudo reboot
```