

深圳市千一显示科技有限公司	Doc.No.:	
	REV : A	PAGE : 1/21
SPEC TITLE DOCUMENT CONTROL SPECIFICATION	EFFECTIVE DATE : 2018-10-05	

Specifications

TFT-LCDmodule

Model No: QY35021A0-00

Customer name:

The project name:

For Customer's Acceptance	
Approved by	Comment

	Signature	Date
Prepared by		
Checked by		
Approved by		

深圳市千一显示科技有限公司	Doc.No.:	
	REV : A	PAGE : 2/21
SPEC TITLE DOCUMENT CONTROL SPECIFICATION	EFFECTIVE DATE : 2018-10-05	

Contents

1	General Description	3
1.1	Features	3
1.2	Application	3
2	Outline Dimension	4
3	Electrical Characteristics	5
3.1	TFT-LCD Module	5
3.2	Back-Light Unit.....	5
4	Block Diagram	6
5	TFT-LCM Interface Specification	7
6	Description of Interface'Signal.....	8
6.1	RGB Interface Timing Characteristics	8
6.2	DC Characteristics	8
6.3	AC Characteristics.....	9
6.4	Reset Characteristics	9
7	Optical Specification.....	10
8	Environment Absolute Maximum Ratings	13
9	Reliability Test Items	13
10	Inspection Standard.....	14
11	Package	15
12	Precautions	16
12.1	Handling	16
12.2	Storage	16
12.3	Operation	17
12.4	Touch Panel Mounting Notes	17
12.5	Others	18
13	Records of Version.....	19

深圳市千一显示科技有限公司	Doc.No.:	
	REV : A	PAGE : 3/21
SPEC TITLE DOCUMENT CONTROL SPECIFICATION	EFFECTIVE DATE : 2018-10-05	

1 General Description

QY35021A0-00 is a transmissive type a-Si TFT-LCD (amorphous silicon thin film transistor liquid crystal display) module, which is composed of a TFT-LCD panel, a driver circuit a backlight unit, The panel size is 3.45inch and thresolution is 320x240. High image quality a-Si TFT LCD module. Partial-screen display function is available. Sleep and Stand-by modes are available for power saving.

1.1 Features

No	Item	Specification	Remark
1	Display Mode	Normally Black	
2	Screen Size	3.45inch (diagonal)	
3	Resolution	320XRGBX240	
4	Color Number	262K	
5	Color Arrangement	RGB-stripe	
6	Driver IC	ST7272A	
7	Back Light	White LED*6	
8	Viewing Direction	ALL O'CLOCK	
9	Interface	RGB18 位	
10	Surface Treatment	UV Cut	

1.2 Application

- ◆ Mobile phone.
- ◆ Portable multimedia device.

2 Outline Dimension

The mechanical detail is shown in Fig. 1 and summarized in Table 1 below.

Parameter	Specifications	Unit
Outline dimensions	76.7 (W) x63.7(H) x3.3+-0.1(D) (LCM,no include FPC)	mm
Active area	70.08(W) x52.56(H)	mm
Resolution	320(H)RGBx 480(V) dots	-
Dot size	0.219(H) ×0.219	mm
Module brightness	500	cd/m ²

深圳市千一显示科技有限公司	Doc.No.:	
	REV : A	PAGE : 5/21
SPEC TITLE DOCUMENT CONTROL SPECIFICATION	EFFECTIVE DATE : 2018-10-05	

3 Electrical Characteristics

3.1 TFT-LCD Module

Ta=25°C

Item	Symbo	Value			Unit	Notes
		Min	Typ	Max		
Supply Voltage for logic	Vcc	2.5	2.8	3.3	V	
	Vci	2.5	2.8	3.3		
TFT Gate ON Voltage	VGH *	11.5		19	V	
TFT Gate OFF Voltage	VGL	-15.5		-7	V	
Operating temperature	Top	-20		+70	°C	
Storage temperature	Tst	-30		+80	°C	

3.2 Back-Light Unit

Item	Symbol	Min.	Typ.	Max.	Unit	Remark
Current	IF	--	20	30	mA	IF=20mA VF=18.3V
Forward voltage	VF	17.6	18.3	19.2	V	
Chroma	X	0.240		0.28		
	Y	0.250		0.29		
Brightness	L	4500			Cd/m2	
Uniformity	UBL	80			%	

- 6 LED
- The luminous intensity of LED is strongly dependent on the driving current.
- It is recommended the input of backlight to be constant current rather than constant voltage.

深圳市千一显示科技有限公司	Doc.No.:	
	REV : A	PAGE : 6/21
SPEC TITLE DOCUMENT CONTROL SPECIFICATION	EFFECTIVE DATE : 2018-10-05	


深圳市千一显示科技有限公司	Doc.No.:	
	REV : A	PAGE : 7/21
SPEC TITLE DOCUMENT CONTROL SPECIFICATION	EFFECTIVE DATE : 2018-10-05	

Pin No.	Symbol	Functional	Notes
1,2	LED-K	Power supply for backlight cathode input terminal.	
3,4	LED-A	Power supply for backlight anode input terminal.	
5,6,7	NC	NC	
8	RESET	Reset signal input Pin	
9	CS	Chip select input pin.	
10	SCL	A write strobe signal can be input via this pin and initiallizes a write	
11	SDI	Serial data input/output bidirectional pin for SPI Interface	
12-19	B0-B7	Data interface	
20-27	G0-G7	Data interface	
28-35	R0-R7	Data interface	
36	HSYNC	Horizontal sync	
37	VSYNC	Vertical sync	
38	PCLK	Dot clock signal for RGB interface operation	
39,40	NC	NC	
41,42	VCC	Power supply input for LCM:2.8V	
43-47	NC	NC	
48	Y+	NC	
49	X+	NC	
50	Y-	NC	
51	X-	NC	
52	DEN	Data enable signal	
53,54	GND	Power Ground	

5 TFT-LCM Interface Specification

6 Description of Interface'Signal

6.1 RGB Interface Timing Charateristics

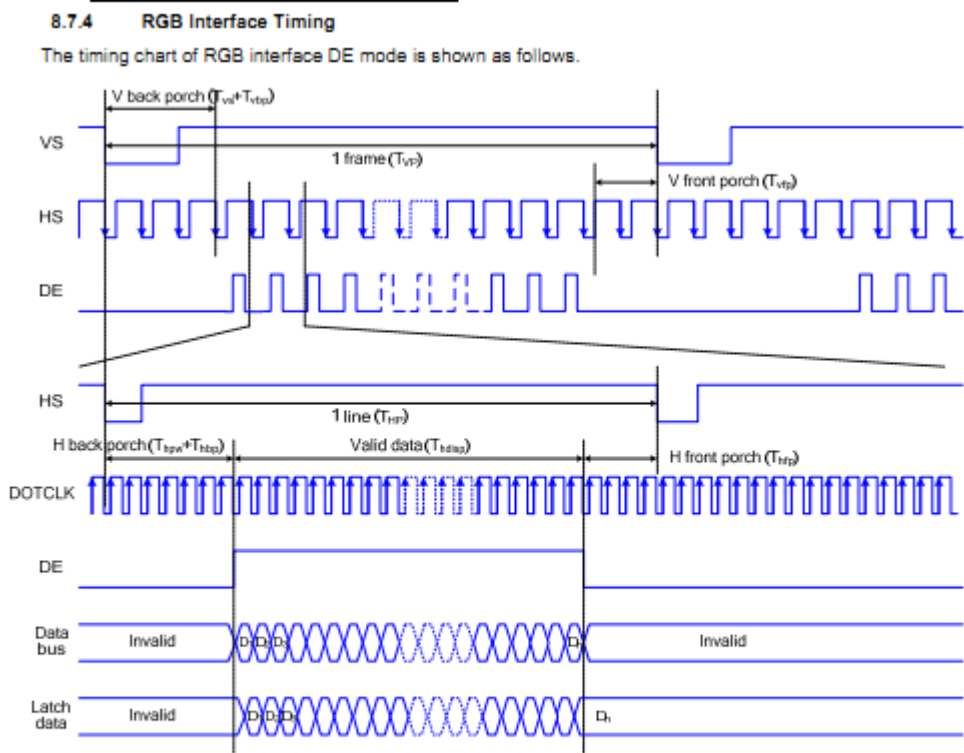

Note: The setting of front porch and back porch in host must match that in IC as this mode.

Figure 28 Timing Chart of Signals In RGB Interface DE Mode

6.2 DC Characteristics

7.2 DC Characteristics

Parameter	Symbol	Condition	Specification			Unit	Related Pins
			MIN.	TYP.	MAX.		
Power & Operation Voltage							
System Voltage	VDD	Operating voltage	2.5	2.8	4.8	V	
Interface Operation Voltage	VDDI	I/O Supply Voltage	1.65	1.8	3.3	V	
Gate Driver High Voltage	VGH		11.5		18	V	Note 4
Gate Driver Low Voltage	VGL		-7.6		-12	V	
Gate Driver Supply Voltage		VGH-VGL	-		30	V	Note 5
Input / Output							
Logic-High Input Voltage	VIH		0.7VDDI		VDDI	V	Note 1
Logic-Low Input Voltage	VIL		VSS		0.3VDDI	V	Note 1
Logic-High Output Voltage	VOH	IOH = -1.0mA	0.8VDDI		VDDI	V	Note 1
Differential Input High Threshold Voltage	VIT+			0	50	mV	MIPI_CLK MIPI_Data
Differential Input Low Threshold Voltage	VIT-		-50	0		mV	
Single-ended Receiver Input Operation Voltage Range	VIR		0.5		1.2	V	
Logic-Low Output Voltage	VOL	IOL = +1.0mA	VSS		0.2VDDI	V	
Logic-High Input Current	IIH	VIN = VDDI			1	uA	Note 1
Logic-Low Input Current	IIL	VIN = VSS	-1			uA	Note 1
Input Leakage Current	IIL	IOH = -1.0mA	-0.1		0.1	uA	Note 1
VCOM Voltage							
VCOM amplitude	VCOM			VSS		V	
Source Driver							
Gamma Reference Voltage(Positive)	VAP		4.4		6.4	V	
Gamma Reference Voltage(Negative)	VAN		-2.6		-4.6	V	
Source Output Settling Time	Tr	Below with 99% precision			10	us	Note 2

Table 2 Basic DC Characteristics

6.3 AC Characteristics

7.5.4 RGB Interface Characteristics :

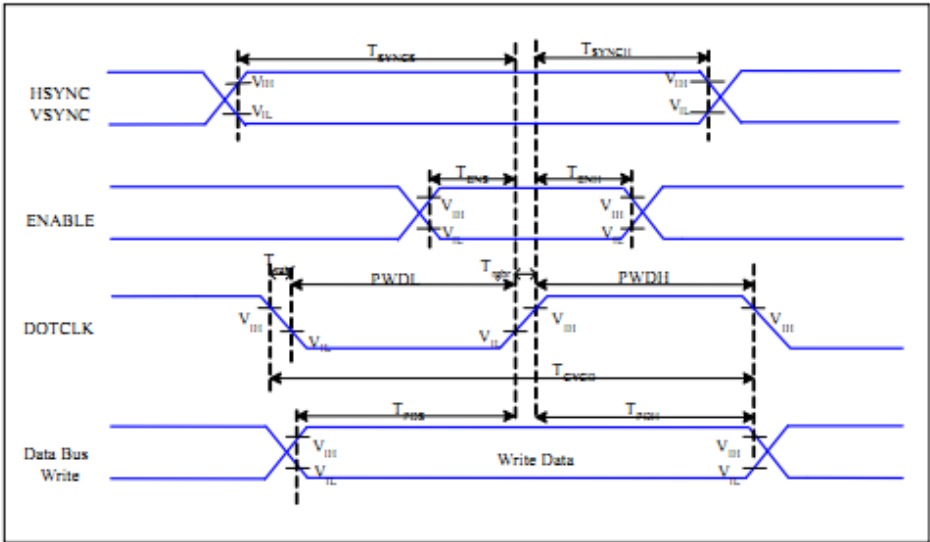


Figure 4 RGB Interface Timing Characteristics

VDDI=1.8, VDD=2.8, AGND=DGND=0V, Ta=25℃

Signal	Symbol	Parameter	MIN	MAX	Unit	Description
HSYNC, VSYNC	T_{syncs}	VSYSNC, HSYNC Setup Time	5	-	ns	
ENABLE	T_{ens}	Enable Setup Time	5	-	ns	
	T_{enH}	Enable Hold Time	5	-	ns	
DOTCLK	PWDH	DOTCLK High-level Pulse Width	13	-	ns	
	PWDL	DOTCLK Low-level Pulse Width	13	-	ns	
	T_{cycb}	DOTCLK Cycle Time	28	-	ns	
	Trghr, Trghf	DOTCLK Rise/Fall time	-	15	ns	
DB	T_{pbs}	PD Data Setup Time	5	-	ns	
	T_{pdH}	PD Data Hold Time	5	-	ns	

Table 7 18/16 Bits RGB Interface Timing Characteristics

6.4 Reset Timing

SPEC TITLE

DOCUMENT CONTROL SPECIFICATION

EFFECTIVE DATE : 2018-10-05

7.5.6 Reset Timing:

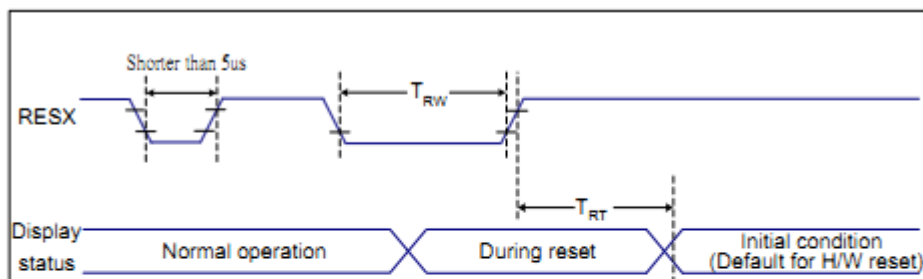


Figure 10 Reset Timing

$VDD1=1.8, VDD=2.8, AGND=DGND=0V, T_a=25\text{ }^{\circ}\text{C}$

Related Pins	Symbol	Parameter	MIN	MAX	Unit
RESX	TRW	Reset pulse duration	10	-	us
	TRT	Reset cancel	-	5 (Note 1, 5)	ms
				120 (Note 1, 6, 7)	ms

Table 10 Reset Timing

Notes:

1. The reset cancel includes also required time for loading ID bytes, VCOM setting and other settings from NVM (or similar device) to registers. This loading is done every time when there is HW reset cancel time (TRT) within 5 ms after a rising edge of RESX.
2. Spike due to an electrostatic discharge on RESX line does not cause irregular system reset according to the table below:

RESX Pulse	Action
Shorter than 5us	Reset Rejected
Longer than 9us	Reset
Between 5us and 9us	Reset starts


3. During the Resetting period, the display will be blanked (The display is entering blanking sequence, which maximum time is 120 ms, when Reset Starts in Sleep Out =mode. The display remains the blank state in Sleep In =mode.) and then return to Default condition for Hardware Reset.

4. Spike Rejection also applies during a valid reset pulse as shown below:

SPEC TITLE

DOCUMENT CONTROL SPECIFICATION

EFFECTIVE DATE : 2018-10-05

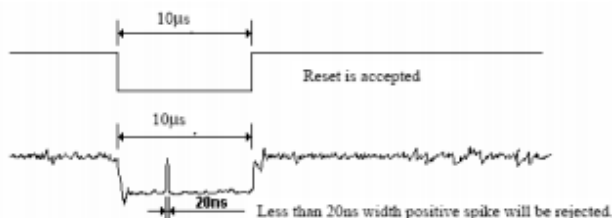

5. When Reset applied during Sleep In Mode.

6. When Reset applied during Sleep Out Mode.

7. It is necessary to wait 5msec after releasing RESX before sending commands. Also Sleep Out command cannot be sent for 120msec.

7. Optical Specification

4.0 OPTICAL CHARACTERISTICS

4.1 Optical Specification

Item		Symbol	Condition	Min.	Typ.	Max.	Unit	Note
Transmittance (with Polarizer)		T (%)	Θ=0 Normal viewing angle	(5.5)	(6.2)	—	%	Measuring with normal polarizer · Reference Only Base on Vop=5.1V
Transmittance (without Polarizer)		T (%)		19.1	21.3	—	%	
Contrast Ratio		CR		640	800	—	—	(1)(2)
Response Time		T _R +T _F		—	30	40	msec	(1)(3)
Color Gamut	(%)			55	60	—	%	C-light
Color Chromaticity (CIE1931)	White	W _x		(0.297)	(0.317)	(0.337)	—	(1)(4) CF glass C-light
		W _y		(0.319)	(0.339)	(0.359)		
	Red	R _x		(0.626)	(0.646)	(0.666)	—	
		R _y		(0.312)	(0.332)	(0.352)		
	Green	G _x		(0.303)	(0.323)	(0.343)	—	
		G _y	(0.547)	(0.567)	(0.587)			
	Blue	B _x	(0.114)	(0.134)	(0.154)	—		
		B _y	(0.101)	(0.121)	(0.141)			
Viewing Angle	Hor.	Θ _L	CR>10	70	80	—	—	(1)(4) Measuring with normal polarizer · Reference Only
		Θ _R		70	80	—		
	Ver.	Θ _U		70	80	—		
		Θ _D		70	80	—		
Optima View Direction		Free						(5)

SPEC TITLE

DOCUMENT CONTROL SPECIFICATION


EFFECTIVE DATE : 2018-10-05

10 Inspection Standard

This standard apply to TFT module specification.

1. Inspection condition:

Under daylight lamp 20~40W, product distance inspector'eye 30cm.incline degree 30° .



2. Inspection standard

NO.	Item	Inspection standard	Rate															
2.1	Dot	Case of Dot defect is below ① Bright Dot (whit spot) : "0" ② Dark Dot (black spot) : "0" (In case of Dark Dot on Main TFT LCD) - NG if there's full Dot defect. - Damaged less than the size of sub-pixel is not counted as defect - Dots darker than the size of sub-pixel are not defined as bright dot defect <table><tr><th>area size (mm)</th><th>Acceptable number</th></tr><tr><td>$\Phi \leq 0.10$</td><td>ignore</td></tr><tr><td>$0.10 < \Phi \leq 0.15$</td><td>3</td></tr><tr><td>$0.15 < \Phi \leq 0.20$</td><td>2</td></tr><tr><td>$0.25 < \Phi \leq 0.25$</td><td>1</td></tr><tr><td>$0.25 < \Phi$</td><td>0</td></tr></table>	area size (mm)	Acceptable number	$\Phi \leq 0.10$	ignore	$0.10 < \Phi \leq 0.15$	3	$0.15 < \Phi \leq 0.20$	2	$0.25 < \Phi \leq 0.25$	1	$0.25 < \Phi$	0	minor			
area size (mm)	Acceptable number																	
$\Phi \leq 0.10$	ignore																	
$0.10 < \Phi \leq 0.15$	3																	
$0.15 < \Phi \leq 0.20$	2																	
$0.25 < \Phi \leq 0.25$	1																	
$0.25 < \Phi$	0																	
2.2	line	<table><tr><th colspan="2">Size (mm)</th><th>Acceptable number</th></tr><tr><td>ignore</td><td>$W \leq 0.03$</td><td>ignore</td></tr><tr><td>$L \leq 4.0$</td><td>$0.03 < W \leq 0.04$</td><td>2</td></tr><tr><td>$L \leq 4.0$</td><td>$0.04 < W \leq 0.05$</td><td>1</td></tr><tr><td></td><td>$0.05 < W$</td><td>Treat with dot non-conformance</td></tr></table>	Size (mm)		Acceptable number	ignore	$W \leq 0.03$	ignore	$L \leq 4.0$	$0.03 < W \leq 0.04$	2	$L \leq 4.0$	$0.04 < W \leq 0.05$	1		$0.05 < W$	Treat with dot non-conformance	
Size (mm)		Acceptable number																
ignore	$W \leq 0.03$	ignore																
$L \leq 4.0$	$0.03 < W \leq 0.04$	2																
$L \leq 4.0$	$0.04 < W \leq 0.05$	1																
	$0.05 < W$	Treat with dot non-conformance																

深圳市千一显示科技有限公司	Doc.No.:	
	REV : A	PAGE : 18/21
SPEC TITLE DOCUMENT CONTROL SPECIFICATION	EFFECTIVE DATE : 2018-10-05	

	Carton outline size: 400×295×145 (mm)
--	---------------------------------------

12 Precautions

Please pay attentions to the followings as using the LCD module.

12.1 Handling

- (a) Do not apply strong mechanical stress like drop, shock or any force to LCD module. It may cause improper operation, even damage.
- (b) Because the polarizer is very fragile and easy to be damaged, do not hit, press or rub the display surface with hard materials.
- (c) Do not put heavy or hard material on the display surface, and do not stack LCD modules.
- (d) If the display surface is dirty, please wipe the surface softly with cotton swab or clean cloth.
- (e) Avoid using Ketone type materials (e.g. Acetone), Toluene, Ethyl acid or Methyl chloride to clean the display surface. It might damage the touch panel surface permanently. The recommended solvents are water and Isopropyl alcohol.
- (f) Wipe off water droplets or oil immediately.
- (g) Protect the LCD module from ESD. It will damage the LSI and the electronic circuit.
- (h) Do not touch the output pins directly with bare hands.
- (i) Do not disassemble the LCD module.
- (j) Do not lift the FPC of Touch Panel.

12.2 Storage

- (a) Do not leave the LCD modules in high temperature, especially in high humidity for a long time.
- (b) Do not expose the LCD modules to sunlight directly.
- (c) The liquid crystal is deteriorated by ultraviolet. Do not leave it in strong

深圳市千一显示科技有限公司	Doc.No.:	
	REV : A	PAGE : 19/21
SPEC TITLE DOCUMENT CONTROL SPECIFICATION	EFFECTIVE DATE : 2018-10-05	

ultraviolet ray for a long time.

- (d) Avoid condensation of water. It may cause improper operation.
- (e) Please stack only up to the number stated on carton box for storage and transportation. Excessive weight will cause deformation and damage of carton box.

12.3Operation

- (a) When mounting or dismounting the LCD modules, turn the power off.
- (b) Protect the LCD modules from electric shock.
- (c) The Driver IC control algorithms stated above should always obeyed to avoid damaging the LSI and electronic circuit.
- (d) Be careful to avoid mixing up the polarity of power supply for backlight.
- (e) Absolute maximum rating specified above has to be always kept in any case. Exceeding it may cause non-recoverable damage of electronic components or, nevertheless, burning.
- (f) When a static image is displayed for a long time, remnant image is likely to occur.
- (g) Be sure to avoid bending the FPC to an acute shape, it might break FPC.
- (h) Most of the touch screens have air vent to equalize the inside air pressure to the outside one. The air vent must be open and liquid contact must be avoided as the liquid may be absorbed if the liquid is accumulated near the air vent.
- (i) For the fragility of ITO film, it should avoid to use too tapering pen as the input material.

12.4Touch Panel Mounting Notes

- (a) If a cushion is used between bezel/housing and film must be choose as free as enough to absorb the expansion and contraction to avoid the distortion of film.
- (b) The cushion must be placed out of the Viewing Area.
- (c) Bezel/Housing edge must be posited between Key Area and Viewing Area. The edge enters the Key Area may cause unexpected input if the gap is too narrow or foreign particles like dusts exist between Bezel/Housing and ITO film.

